WELDAS®

The Professional's Choice

2018

Europe Catalog No. 1018

WELCOME TO THE WELDAS EUROPE CATALOG!

This catalogue wants to inform you about the Weldas products which are manufactured in our own, by TÜV, ISO certified factory. Most of the products are also CE certified, again by TÜV, and you find the information with the products including the numbers of the certificates, copies of these certificates are always at your disposal: www.weldas-ce.com. The pH, CHROMIUM (VI) and PCP levels of all materials in Weldas products have been tested and meet CE health standards. Colouring is done by natural materials. Please visit for more information our website: www.weldas.com.

WILKOMMEN IM WELDAS EUROPE KATALOG!

Dieser Katalog informiert Sie über die Weldas Produkte, die in unserem, vom TÜV, ISO zertifiziertem Werk, hergestellt werden. Die meisten Weldas Produkte sind vom TÜV nach den CE-Richtlinien zertifiziert. Die Nummern der Zertifikate entnehmen Sie bitte der Produktbescheibung. Kopien sind selbstverständlich jederzeit zu erhalten: www.weldas-ce.com. Die pH-, Chromium-(VI) und PCP-Werte aller Weldas Materialen sind nach den CE Gesundheitsstandards getestet. Zur Materialfärbung werden nur natürliche Farben verwendet. Bitte besuchen Sie auch unsere Homepage: www.weldas.com.

BIENVENUE DANS LE CATALOGUE WELDAS!

Ce cataloque a pour but de vous informer sur les produits Weldas, fabriqués dans notre propre usine et certifés ISO par TÜV. La plupart de nos produits sont aussi certifiés CE pas TÜV. Vous trouverez ces information avec le produits, y compries les numéros des certificats, les copies de ces certificats sont toujours à votre disposition: www.weldas-ce.com. Les niveaux de pH, Chrome (VI) et de PCP sont testés sur chaque produit Weldas et sont conformes aux standards de la santé CE. Les couleurs proviennent de matériaux naturels. Vous pouvez aussi visiter notre site: www.weldas.com.

WELKOM IN DE WELDAS EUROPE CATALOGUS!

Deze catalogus wil u informeren over de Weldas producten gefabriceerd in onze eigen, door TÜV, ISO gecertificeerde fabriek. De meeste van onze producten zijn CE gecertificeerd, door TÜV. De informatie hierover vindt u terug bij de producten, inclusief de nummers van de certificaten. Kopieën van deze certificaten zijn ten alle tijden bij ons verkrijgbaar: www.weldas-ce.com. De pH, CHROMIUM (VI) en PCP waarden van alle materialen in de Weldas producten zijn getest en voldoen aan de CE standaards. Verven van de producten gebeurt met natuurlijke materialen. Bezoek voor meer informatie onze website: www.weldas.com.

BEM-VINDO AO CATÁLOGO EUROPEU DA WELDAS!

Este catálogo contem informações sobre os produtos Weldas produzidos na nossa própria fábrica, a qual possui certificação TÜV e ISO. A maior parte dos nossos produtos são também certificados pela CE e TÜV. Encontrará essa informação junto aos produtos. O número das certificações, assim como as cópias das mesmas estarão sempre à sua disposição: www.weldas-ce.com. Os níveis de PH, Crómio e PFC de todos os materiais dos produtos Weldas foram submetidos a teste e obedecem às normas de saúde da CE. A coloração é feita através de substâncias naturais. Convidámo-lo a visitar o nosso site, onde poderá obter mais informações: www.weldas.com.

BIENVENIDO AL CATALOGO DE WELDAS EUROPE!

Este catalogo les ayudara informales sobre los productos de Weldas. Los productos son confeccionado bajo las normas de TÜV y llevan certificado ISO. La mayoría de los productos llevan también el certificado CE, impreso en los mismos productos Weldas. También les podemos facilitar copias de los certificados: www.weldas-ce.com. El pH, cromo y el nivel de PCP han sido ensayado y son conforme con los estándar CE de salud. El tenido de la piel se hace con materiales naturales. Por favor visiten nuestra pagina web: www.weldas.com.

BENVENUTI NEL CATALOGO WELDAS EUROPA!

Questo catalogo è stato concepito per informare su quanto la WELDAS produce in proprio attraverso un'azienda certificate ISO dal TUV. La maggior parte dei prodotti sono anche certificati CE, sempre dal TUV, e le copie di questi certificati sono comunque a vostra disposizione: www.weldas-ce.com. Il PH, il cromo (VI) ed i livelli PCP di tutti i materiali nei prodotti Weldas sono stati testate ed incontrano gli standard CE. La colorazione viene effettuata utilizzando solo sostanze naturali. Potete visitare il nostro sito all'indirizzo: www.weldas.com.

WITAMY W KATALOGU WELDAS EUROPE!

W niniejszym katalogu chcemy przedstawić Państwu produkty Weldas produkowane w naszej fabryce, certyfikowanej przez TÜV oraz spełniającej normy ISO. Większość naszych produktów jest również przetestowana przez TÜV i posiada niezbędne certyfikaty CE, które są zawsze do Państwa dyspozycji i o których więcej możecie Państwo przeczytać przy poszczególnych produktach: www.weldas-ce.com. Materiały używane do produkcji są regularnie testowane i spełniają wszelkie wymagania CE dla poziomów PH, chromu VI oraz PCP, a ich barwienie następuje przy użyciu naturalnych barwników. Po więcej informacji zapraszamy na naszą stronę: www.weldas.com.

VÄLKOMMEN TILL WELDAS EUROPE´S KATALOG!

Med denna katalog vill vi informera er om Weldas´ produkter, som är tillverkade i vår egen, av TÜV, ISO certifierade fabrik. De flesta av våra produkter är även CE certifierade, också av TÜV, och du kan hitta den informationen tillsammans med produkterna, inkluderande antalet certifikat. Kopior av certifikaten finns alltid tillgängliga för er: www.weldas-ce.com. pH-värdet, Krom (VI), och PCP halterna för alla material i Weldas´ produkter har testats, och möter CE´s hälsostandard. Färgning är gjord med naturmaterial.Besök gärna vår hemsida www.weldas.com för mer information!

VELKOMMEN TIL WELDAS EUROPA'S KATALOG!

Med dette katalog vil vi informere om Weldas produkterne, som er fremstillet på vores egen fabrik, der er TÜV og ISO certificeret. Mange af produkterne er også CE certificeret, også af TÜV. Herudover er der informationer om produkterne, antal certifikater som ligger på vores hjemmeside til fri download: www.weldas-ce.com. Ph, Crom6 og formaldehyd grænserne på alle Weldas produkter er testet og over-holder EU standard. Indfarvning er udført med naturprodukter. Ønskes flere informationer, kan disse findes på: www.weldas.com.

VELKOMMEN TIL WELDAS EUROPA KATALOGEN!

Denne katalogen vil informere deg om Weldas produktene som er produsert i vår egen, by TÜV, ISO sertifiserte fabrikk. De fleste produktene er også CE sertifiserte, igjen av TÜv, og du vil finne informasjon inkludert nummrene på sertifikatene, kopier av disse sertifikatene er alltid tilgjengelige: www.weldas-ce.com. PH, CHROMIUM(VI) og PCP nivåene i alle Weldas produktene har blitt testet og imøteser CE helsestandarden. Fargingen er gjort med naturlige materialer. For mer informasjon besøk vår hjemmeside: www.weldas.com.

TERVETUOLOA TARKASTELEMAAN WELDAS EUROPEN LUETTELOA!

Tämä luettelo haluaa antaa tietoja Weldasin tuotteista, jotka on valmistettu omassa TÜV- ja ISO-sertifioidussa tehtaassamme. Suurimmalla osalla tuotteista on myös TÜV:n myöntämä CE-sertifikaatti. Löydät nämä tiedot tuotteiden kohdalta yhdessä sertifikaatin numeron kanssa. Voit halutessasi saada kopiot sertifikaateista: www.weldas-ce.com. Kaikkien Weldasin tuotteissa käytettyjen materiaalien pH-, kromi(VI)- ja PCP-arvot on testattu, ja ne ovat CE-terveysstandardien mukaisia. Värjäys on tehtyluonnollisilla aineilla. Enemmän tietoa löytyy verkkosivuiltamme: www.weldas.com.

TERE TULEMAST KOMPANII WELDAS EUROOPA KATALOOGI!

Käesoleva kataloogiga me soovime Teid informeerida Weldas toodetest. Weldas on TÜV-i liige, sellepärast kõik meie tehases valmistatud tooted sertifitseeritakse ISO-ga. Suurem osa toodangut omab samuti märki CE. Teie käsutuses on sertifikaatide loetelu ja koopiad koos toodetega: www.weldas-ce.com. Happesuse (pH), kroomi (IV) и PCP tase Weldas toodetes on testitud ja vastab CE tervise standartile.Toodete värvimine on teostatud naturaalsete ainetega. Täpsema informatsiooni saamiseks, külastage meie web: www.weldas.com.

LAIPNI LŪGTI WELDAS EUROPE KATALOGĀ!

Šajā katalogā vēlamies informēt par Weldas precēm, ražotām mūsu pašu rūpnīcā, kurai ir TUV un ISO sertifikāts. Vairumam preču ir arī TUV izsniegts CE sertifikāts, par kuru vajadzīgo informāciju jūs atradīsit pie attiecīgajām precēm, ieskaitot sertifikātu numurus, šo sertifikātu kopijas vienmēr ir jūsu rīcībā: www.weldas-ce.com. pH, hroma (VI) un PCP līmenis visos Weldas precēs izmantotajos materiālos ir pārbaudīts un atbilst CE veselības standartiem. Krāsām ir izmantoti dabīgi materiāli. Lai iegūtu vairāk informācijas, lūdzu apmeklējiet mūsu mājas lapu: www.weldas.com.

SVEIKI ATVYKĘ Į WELDAS EUROPE KATALOGĄ!

Šiame kataloge norime jus informuoti apie Weldas produktus, kuriuos gaminame patys gamykloje turinčioje ISO sertifikatą. Didesnė dauguma mūsų produkcijos turi EB tipo tyrimo sertifikatus. Visus sertifikatus ir informaciją apie produktus rasite mūsų internetiniame puslapyje: www.weldas-ce.com. Visi Weldas produktai yra patikrinti dėl PH lygio, chromo kiekio ir PCP ir atitinka visus EB keliamus sveikatos reikalavimus. Taip pat norime paminėti, kad visi mūsų produktai yra dažomi natūraliomis medžiagomis. Dėl platesnės informacijos apie mūsų produktus prašome apsilankyti mūsų internetiniame puslapyje: www.weldas.com.

Добро пожаловать в Европейский каталог компании Weldas!

В этом каталоге мы хотим представить Вам информацию о продукции Weldas. Weldas является членом TÜV, поэтому все изделия, производимые на нашем заводе, сертифицируются ISO. Большая часть продукции имеет также знак CE. Также в Вашем распоряжении вместе с продукцией перечень сертификатов и их копии: www.weldas-ce.com. Уровни pH, хрома (IV) и PCP материалов в продукции Weldas тестированы и соответствуют стандартам здоровья CE. Окраска изделий произведена натуральными веществами. Для получения более подробной информации посетите наш сайт: www.weldas.com.

VÍTEJTE NA STRÁNKÁCH WELDAS EUROPE KATALOGU!

Tento katalog má za cíl vás informovat o produktech Weldas, které jsou vyráběny v naší vlastní, TÜV a ISO certifikované továrně.Většina produktů je nejen podle CE (evropských norem) certifikována,ale rovněž také zkoušena TÜV a informace o tom naleznete pod číslem certifikátu na výrobku.Kopie certifikátů jsou vám vždy k dizpozici: www.weldas-ce.com. Hodnoty pH,Chromu (VI) a výkonostní stupně všech používaných materiálů firmou Weldas byly testovány a vyhovují CE evropským zdravotním normám.Barvení je provedeno přírodními materiály. Prosím, pro více informací navštivte naše vebové stránky: www.weldas.com.

VITAJTE V KATALÓGU WELDAS EUROPE!

Tento katalóg by Vás rád informoval o produktoch Weldas, ktoré sú vyrábané v našej vlastnej továrni, certifikovanej podľa noriem TÜV a ISO. Väčšina týchto produktov je takisto certifikovaná podľa noriem CE, a tiež podľa noriem TÜV. V katalógu nájdete pri produktoch informácie ohľadom počtu certifikátov. Kópie týchto certifikátov budete mať neustále k dispozícii: www.weldas-ce.com. Hodnoty pH, chrómu a PCP všetkých materiálov v produktoch Weldas sú testované a vyhovujú európskym zdravotným normám CE. Zafarbenie produktov je realizované farbivami z prírodných materiáloch. Prosím navštívte našu webovú stránku: www.weldas.com, kde získate viac informácií.

KÖSZÖNTI ÖNTA WELDAS EURÓPA CATALOG!

Ez a katalógus a Weldas termékekről nyújt Önnek információt, melyek a saját, TÜV illtveISO minősítéssel rendelkező gyárunkban készültek. A termékeink többsége CE tanúsítvánnyal illetve TÜV bevizsgálással rendelkezik. A tanúsítvány számára vonatkozó hivatkozást a termékeknél találja, és ezen tanúsítványok másolata mindenkor az Ön rendelkezésére áll: www.weldas-ce.com. A Weldas termékek anyagainak ph, Chromium (VI) és PCP szintjeit mindenkor ellenőrzik, melyek a CE egészségügyi standard előírásainak megfelelnek. A termékek színezése csak természetes anyagokkal történik.Kérjük további információért keresse fel honlapunkat: www.weldas.com.

BINE AŢI VENIT LA CATALOGUL WELDAS EUROPE!

Acest catalog vă informează despre produsele Weldas, care sunt fabricate în fabrici proprii, certificate TUV sau ISO. Majoritatea produselor sunt atestate CE, de asemenea şi TUV şi puteţi găsi toate informaţiile despre produse, incluzând numărul certificatelor, copii ale acestora sunt la dispoziţia dumneavoastră: www.weldas-ce.com. Nivelul pH, Crom (VI) şi PCP pentru toate materialele produselor Weldas au fost testate şi îndeplinesc standardele de sănătate CE. Vopsirea se realizează cu material naturale. Pentru informaţii suplimentare vă rugăm să vizitaţi website-ul nostru: www.weldas.com.

ДОБРЕ ДОШЛИ НА СТРАНИЦИТЕ НА КАТАЛОГА НА WELDAS!

Този каталог има за цел да ви информира за продуктите, предлагани от Weldas и произведени в сертифицираната по ISO и TÜV фабрика на Weldas . Повечето от продуктите имат CE маркировка и сертификати, издадени от TÜV. Информация за номерата на сертификатите и самите сертификати са винаги на разположение на клиентите: www.weldas-ce.com. Стойността на pH , съдържанието на хром (VI) и PCP нивото на всички материали, от които се произвеждат продуктите на Weldas съответстват на CE здравните изисквания. Естествени материали се използват при багренето на продуктите. За повече инфомация посетете: www.weldas.com.

DOBRODOŠLI V EVROPSKEM KATALOGU WELDAS!

S tem katalogom Vas želimo obvestiti o izdelkih Weldas iz naše lastne TÜV in ISO certificiracirane proizvodnje. Večino naših izdelkov ima CE certifikat (prav tako izdan s strani TÜV), kar je ob izdelkih označeno s številko certifikata, kopije certifikatov pa so Vam vedno na voljo: www.weldas-ce.com. Vrednosti pH, heksavalantnega kroma in PCP v materialih, ki jih uporablja Weldas, so preverjene in ustrezajo standardom EN. Za barvanje uporabljamo le naravne materiale. Vabimo Vas, da obiščete našo spletno stran: www.weldas.com.

DOBRODOŠLI U EUROPSKI WELDAS-ov KATALOG!

Ovaj katalog Vas želi informirati o Weldasovim proizvodima koji su proizvedeni u našoj vlastitoj tvornici, kaja ujedno posjeduje i ISO certifikat izdan od strane TUV certifikacijske kuće. Velika većina naših proizvoda certificirana je i ima CE oznaku, izdanu od TUV-a. Uvijek možete saznati sve informacija o proizvodima uključujući i broj certifikata. Isto tako kopije ovih certifikata u svakom trenutku dostupne su Vam preko naše web stranice: www.weldas-ce.com. pH, krom (VI) i PCP razine svih Weldasovih proizvoda permanetno se provjeravaju i testiraju, te zadovoljavaju sve CE zdrastvene standarde. Bojanje se vrši prirodnim materijalima. Za više informacija molim Vas posjetite našu web stranicu: www.weldas.com.

DOBRODOŠLI U WELDASOV KATALOG ZA EVROPU!

Katalog vam pruža informacije o Weldasovim proizvodima , proizvedenim u nasoj TÜV i ISO sertifikovanoj fabrici. Većina proizvoda poseduje CE sertifikat izdat od strane TÜV - a, takođe u katalogu možete pronaći informacije o broju sertifikata za svaki proizvod, kopije istih su vam uvek na raspolaganju: www.weldas-ce.com. PH, CHROMIUM (VI) i PCP nivoi svih materijala korišćenih u Weldasovim proizvodima su testirani i u skladu sa CE zdravstvenim standardima. Za bojenje proizvoda su korišćeni prirodni materijali. Za više informacija posetite našu internet prezentaciju na: www.weldas.com.

COMFOflex® WELDING GLOVES

Cotton lining



Foam lining

COMFOflex® lining

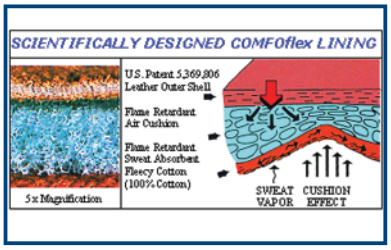

COMFOflex®

10-2000

S, L, XL, XXL
LH

L/18"

35 cm.

46 cm. (L/18")

- A-grade cow split leather
- Hand *COMFOflex*® lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46 cm.)

95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002

CE

413X3X 4133 www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-2178

L

35 cm.

- Same features like the 10-2000 glove
- One finger model

95%

KEVLAR® 4 ply

COMFOflex®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0002
TÜV 21128415 002

CE

413X3X 4133 www.weldas.com

10-2087

L, XL

35 cm.

- A-grade cow shoulder split leather
- Hand full *COMFOflex*® lined
- Cuff cotton lined
- Wide body model

95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002

CE

413X3X 4133 www.weldas.com

Ω ELECTROSTATIC TESTED Ω

COMFOflex® WELDING GLOVES

10-2900

L, XL

36 cm.

- A-grade cow split leather
- Hand *COMFOflex*® and wool lined
- Cuff flame retardant lined
- Wide body model

70%

250°C CONTACT

KEVLAR® 4 ply + 5 ply



STEERSOtuff®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002

423X4X 4233 www.weldas.com

10-2655

M, L, XL, XXL

37 cm.

- Hand bison leather
- Cuff split cowhide
- Inner back of the hand *COMFOflex*® lined
- Cuff flame retardant lined
- **CHROMIUM < 2 mg./kg.**

CHROMIUM < 2 mg./kg.

30%

250°C CONTACT

KEVLAR® 4 ply + 5 ply

ThunderingBison™

EN 12477 (09.2005) TYPE A/B
TÜV BP 21146065 001
TÜV 556-10-0071/01

423X4X 4144 www.weldas.com

10-2850

L, XL

36 cm.

- Grain and split deerskin
- Backhand *COMFOflex*® lined and inner cuff flame retardant lined
- Highest comfort level

30%

KEVLAR® 4 ply + 5 ply

DEERSOsoft®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002

313X4X 3133 www.weldas.com

COMFOflex® WELDING GLOVES

10-2750

L, XL, XXL

36 cm.

- A-grade cow grain leather
- Backhand ***COMFOflex***® lined and cuff cotton lined
- Back palm reversed grain (suede)
- Oil and water resistant
- Excellent quality and comfortable to wear

30%

250°C CONTACT

KEVLAR® 4 ply + 5 ply

STEERSOtuff®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002

CE

423X4X | 4143 | www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-2755

L, XL

36 cm.

- Combined features:
- on the back of our 10-2385
- and the innerhand of the 10-2750 with extra comfort padges
- Oil and water resistant
- Excellent quality and comfortable to wear

30%

350°C CONTACT

KEVLAR® 4 ply + 5 ply



COMFOflex®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003

CE

433X4X | 2143 | www.weldas.com

10-2385

L, XL, XXL

35 cm.

- A-grade cow side split leather
- Hand full ***COMFOflex***® lined and cuff full flame retardant lined
- Wide body model
- Aluminized back is designed to reflect radiant heat and has a layer of split deerskin in between the back and ***COMFOflex***® lining

35%

KEVLAR® 4 ply



COMFOflex®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002

CE

41344X | 4133 | www.weldas.com

+

=

44-3006LB, 44-3008LB, 44-3009BF:
see page 39

COTTON LINED WELDING GLOVES

10-2392

S, L, XL, XXL
LH/L, LH/XL

L/18"

34 cm.

46 cm. (L/18)

- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better
- Size L also available in 18" (46 cm.)
- Size L and XL also available in Left Hand only pairs (LH)

95% KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002

CE

413X4X 3124 www.weldas.com

10-2392 MIT

L

34 cm.

- One finger model of glove 10-2392
- Cow shoulder split leather
- Full cotton lined

95% KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002

CE

413X4X 3124 www.weldas.com

10-2392GB

L, XL

34 cm.

- Same as glove 10-2392, but *Golden Brown*™ model
- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better

95% KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002

CE

413X4X 3124 www.weldas.com

10-2150

L, XL

36 cm.

- Innerhand is made of cow grain leather to make it oil and water resistant
- All other parts of the glove are made of cow split leather
- Full cotton lined

95%

250°C CONTACT

EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003

CE

423X4X 2122 www.weldas.com

COTTON LINED WELDING GLOVES

10-2101

S, L, XL, XXL
LH/L, LH/XL

34 cm.

- The 10-2101 is our general purpose glove of the range
- Cow shoulder split leather
- Full cotton lined
- Size L and XL also available in Left Hand only pairs (LH)

90%

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE

413X4X | 3134 | www.weldas.com

10-2101GB

L, XL

34 cm.

- Same as glove 10-2101, but *Golden Brown*™ model
- Cow shoulder split leather
- Full cotton lined

90%

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE

413X4X | 3134 | www.weldas.com

Weldas sizing incorporates EN 420 size standards, the lining and the intended use

(EN 420)

GLOVE AND HAND SIZE REFERENCE

Hand Size Index	7½	8½	9	9½	10½
Weldas Size Label	S	M	L	XL	XXL
Measurement mm	190	216	229	241	267



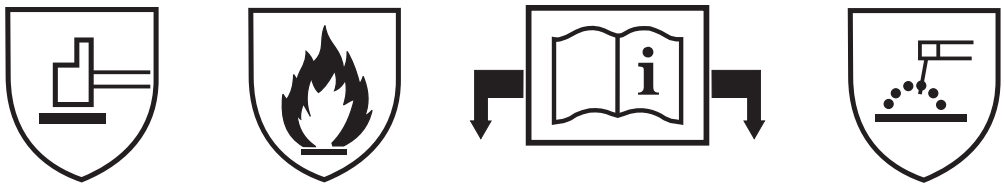

WWW.WELDAS-CE.COM

SOFTouch™ TIG WELDING GLOVES

10-1003

M, L, XL, XXL

35 cm.

- Oil and abrasion resistant
- Reversed (suede) grain pig leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE

413X4X | 3121 | www.weldas.com

10-1004

S, M, L, XL, XXL
RH/XL

35 cm.

- Hand made of goatskin
- Double leather in the palm
- Very soft and excellent feeling
- Cuff made of grey flame retardant fabric
- Size XL also available in Right Hand only pairs (RH)

KEVLAR® 3 ply

SOFTouch™

EN 12477 (2001 + A1 : 2005)
TYPE B
TÜV BP 60118529 0001
TÜV 21264046 002

CE

412X4X | 2111 | www.weldas.com

10-1005

S, M, L, XL, XXL

35 cm.

- Very smooth and pliable
- Calfskin grain leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002

CE

412X4X | 2122 | www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-1007

M, L, XL

35 cm.

- Goatskin palm
- Cow split leather back and cuff

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B
TÜV BP 60017622 0003
TÜV 21128415 002

CE

412X4X | 2111 | www.weldas.com

SOFTouch™ TIG WELDING GLOVES

10-1009

M, L, XL, XXL

35 cm.

- Hand made of goatskin
- Very soft and excellent feeling
- Cuff made of split cow leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B
TÜV BP 60017622 0004
TÜV 21128415 002

CE

412X4X | 2111 | www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-1050

M, L, XL, XXL

32 cm.

- Outer hand made of soft black grain cow leather
- White grain goat leather spacers on the sides of the fingers
- Curved cuff made of supple split cow leather trimmed at the edge with white grain goat leather
- Thin fleecy, flame retardant lining at the back of the hand
- Seamless index finger

KEVLAR® 4 ply

SOFTouch™

EN 12477 (2001 + A1 : 2005)
TYPE B
TÜV BP 60123577 0001
TÜV 21276706 001

CE

412X4X | 2142X | www.weldas.com

10-2304

M, L, XL, XXL

32 cm.

- Hand made of deerskin
- Very soft feeling
- Cuff made of split cow leather

KEVLAR® 3 ply

DEERSOsoft®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0004
TÜV 21128415 002

CE

413X4X | 2133 | www.weldas.com

10-2644

M, L, XL, XXL

32 cm.

- Hand bison leather
- Cuff split cowhide
- **CHROMIUM < 2 mg./kg.**

CHROMIUM < 2 mg./kg.

KEVLAR® 3 ply

Thundering Bison ThunderingBison™

EN 12477 (09.2005) TYPE A/B
TÜV BP 21146065 001
TÜV 556-10-0071/01

CE

412X4X | 2143 | www.weldas.com

WORKING GLOVES

10-2660

L, XL

23 cm.

- Work glove designed for general purpose applications
- Grain pig leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk

xxxx

According to 89/686/EEC:
not to be used in an
industrial environment

CE

10-2670

M, L, XL, XXL

23 cm.

- Work glove designed for general purpose applications
- Grain goat leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk

xxxx

According to 89/686/EEC:
not to be used in an
industrial environment

CE

10-2680

L, XL

23 cm.

- Work glove designed for general purpose applications
- Grain cow leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk

xxxx

According to 89/686/EEC
not to be used in an
industrial environment

CE

WORKING GLOVES

10-2806

L

25 cm.

- Cow split leather
- Double leather in the palm
- Cotton lined
- Rubberized safety cuff

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3244X

www.weldas.com

10-2209

S, M, L, XL, XXL

26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3243X

www.weldas.com

10-2209LB

L, XL

26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff
- *Lava Brown*™ model

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3144X

www.weldas.com

10-2207

L, XL

25 cm.

- Cow split leather
- Cotton lined
- Safety cuff

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3244X

www.weldas.com

DRIVER GLOVES

10-2064

L, XL

24 cm.

- Durable split cow leather

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3123X

www.weldas.com

10-2336

M, L, XL

24 cm.

- Palm made of cow grain side leather
- Back made of split cow leather
- Extra fingertip sensitivity

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

2121X

www.weldas.com

10-2633

M, L, XL, XXL

25 cm.

- Innerhand made of grain bison leather
- Back made of split cow leather
- **CHROMIUM < 2 mg./kg.**

KEVLAR® 3 ply

CHROMIUM < 2 mg./kg.

Thundering Bison

ThunderingBison™

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

2123X

www.weldas.com

10-2700

S, M, L, XL, XXL

26 cm.

- Cow grain side leather of the highest quality
- Oil and water resistant

STEERSOtuff®

EN 388 (2016)
UL 0843-PPE-0115
UL NC29550-D1-EDO

CE

3143X

www.weldas.com

COMFOflex®
SOFTouch™
DEERSOsoft®
ThunderingBison™
TURMOflex®
Lava Brown™
STEERSOtuff®
Arc Knight®
Arc Queen™
Golden Brown™
Fire Fox™
Yellowjacket®
SWEATSOpad®
COMBOframe™
LAVAshield®
PYTHONrap™
Glove Medic™

Lava Brown™ CLOTHING

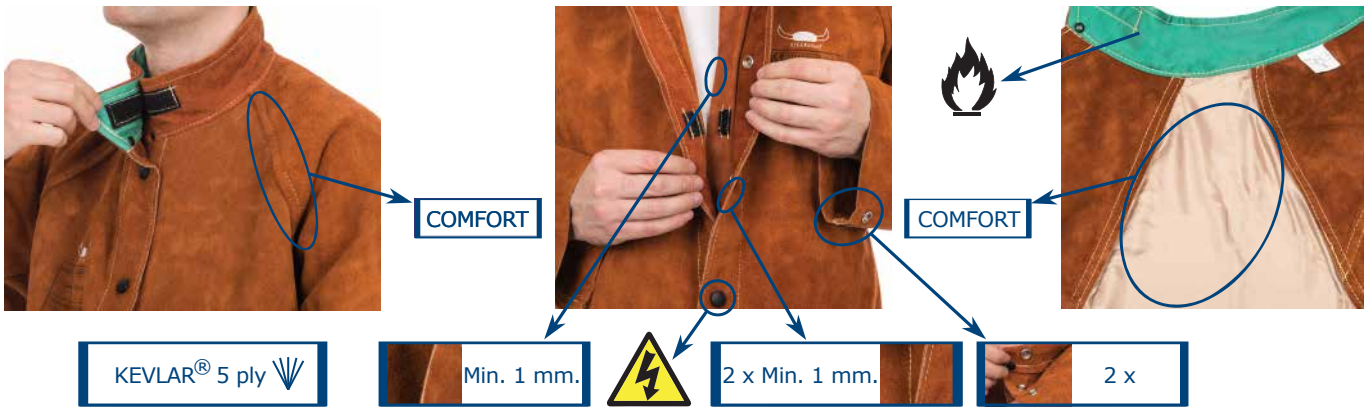

Lava Brown™ products are made of high quality A-grade side split cow leather

44-7300 Jacket full leather

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7300M	76 cm.	100 cm.
44-7300L	81 cm.	112 cm.
44-7300XL	86 cm.	124 cm.
44-7300XXL	91 cm.	136 cm.
44-7300XXXL	96 cm.	148 cm.
44-7300XXXXL	96 cm.	160 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-7300/P Jacket with flame retardant back

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./m²

44-7300M/P	76 cm.	100 cm.
44-7300L/P	81 cm.	112 cm.
44-7300XL/P	86 cm.	124 cm.
44-7300XXL/P	91 cm.	136 cm.
44-7300XXXL/P	96 cm.	148 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 1/A1+A2

Lava Brown™ CLOTHING

44-7300/P-AQ Ladies jacket with flame retardant back

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./m²

44-7300S/P-AQ	76 cm.	98 cm.
44-7300M/P-AQ	76 cm.	110 cm.
44-7300L/P-AQ	81 cm.	120 cm.
44-7300XL/P-AQ	86 cm.	130 cm.

Arc Queen™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 1/A1+A2

44-7800 Cape sleeve

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7800M	100 cm.
44-7800L	112 cm.
44-7800XL	124 cm.
44-7800XXL	136 cm.
44-7800XXXL	148 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-78.. Apron for cape sleeves

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7820	51 cm.	56 cm.
44-7828	71 cm.	56 cm.
44-7836	91 cm.	60 cm.
44-7836XL	120 cm.	80 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Lava Brown™ CLOTHING

44-7248
Pants with breast protection and open back

122 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440
Pants with open back

102 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-7440/7600 Pants with closed back

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7600M	110 cm.
44-7440/7600L	112 cm.
44-7440/7600XL	116 cm.
44-7440/7600XXL	122 cm.
44-7440/7600XXXL	128 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-7440/7648 Pants with breast protection and closed back, bib and brace

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7648M	136 cm.
44-7440/7648L	140 cm.
44-7440/7648XL	144 cm.
44-7440/7648XXL	148 cm.
44-7440/7648XXXL	152 cm.
44-7440/7648XXXXL	156 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Lava Brown™ CLOTHING

44-71.. Apron

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

	↕	↔
44-7124	60 cm.	60 cm.
44-7136	91 cm.	60 cm.
44-7142	107 cm.	60 cm.
44-7142 W	107 cm.	80 cm.
44-7148	122 cm.	60 cm.
44-7148 W	122 cm.	80 cm.

COMFORT

44-7124
60x60 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-7023 Sleeves

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Balancing strap system

44-7023 ↕ 58 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-7028 Heavy duty arm guard (piece)

- Heavy duty
- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- *COMFOflex*® lining used
- Hook and loop closure
- Inside 520 gr./m² flame retardant fabric
- See for extension 44-7114EXT (page 20)

	↕	⟳	⟳
44-7028	35 cm.	32-41 cm.	35-45 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Lava Brown™ CLOTHING

44-7106 Spats for shoe protection

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-7106	33-43 cm.	15 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

44-7114 Spats for leg and shoe protection

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation
- See for extension 44-7114EXT

44-7114	37-47 cm.	36 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

44-7114EXT Diameter extension for 44-7114 and 44-7028

44-7114EXT + 44-7114 = 52-62 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- 15 cm. wide extension for 44-7114 and 44-7028

44-7114EXT	15 cm.

STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001

CE

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

The professional's choice world wide

Weldas® on going product development and quality control supported by field testing has earned a world wide reputation for the highest quality and most innovative products.

Weldas® products are marked with appropriate EN marking standards and are manufactured in our own, by TÜV, ISO certified factory.
Most of the products are also CE certified by TÜV Germany, certificates can be found on www.weldas-ce.com

The pH, CHROMIUM (VI) and PCP levels of all materials in Weldas® products have been tested and meet CE health standards.
Colouring is done by natural materials.

Weldas® also offers a custom designed product line for special application and marketing needs in models, packaging, barcode etc..
For more information on this contact Weldas®.

Weldas® products are warranted against manufacturing defects. Because of applications vary, it is the user's responsibility to select the right product for each application.

Weldas® is active in the following markets:
- Welding market.
- Personal protection market.
- General industrial market.

www.weldas.com

Golden Brown™ CLOTHING

KEVLAR® 3 ply | Min. 1 mm. | 2 x Min. 1 mm. | 1 x

Golden Brown™ products are made of high quality side split or grain cow leather

Golden Brown™ split leather products: pages 22, 23, 24, 25. Grain leather products: page 26.

44-2530/P Jacket with flame retardant back

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 305 gr./m²

44-2530M/P	76 cm.	100 cm.
44-2530L/P	81 cm.	112 cm.
44-2530XL/P	86 cm.	124 cm.
44-2530XXL/P	91 cm.	136 cm.
44-2530XXXL/P	96 cm.	148 cm.

Golden Brown™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001

CE

www.weldas.com

EN ISO 11611:2015 CLASS 1/A1+A2

44-2847 Shoulder apron

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2847M	92 cm.	53 cm.
44-2847L	92 cm.	58 cm.
44-2847XL	92 cm.	63 cm.

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

Golden Brown™ CLOTHING

44-2800 Cape sleeve

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2800L	112 cm.
44-2800XL	124 cm.
44-2800XXL	136 cm.

Golden Brown™ Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-28.. Apron for cape sleeves

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

	↕	↔
44-2828	71 cm.	56 cm.
44-2836	91 cm.	56 cm.

Golden Brown™ Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-21.. Apron

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

	↕	↔
44-2136	91 cm.	60 cm.
44-2142	107 cm.	60 cm.
44-2142 W	107 cm.	80 cm.

Golden Brown™ Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Golden Brown™ CLOTHING

44-2600 Pants

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2600M	110 cm.
44-2600L	112 cm.
44-2600XL	116 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-2648 Pants with breast protection, bib and brace

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2648M	136 cm.
44-2648L	140 cm.
44-2648XL	144 cm.
44-2648XXL	148 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-2321, 44-2321XL Sleeves

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Hook and loop closure at the top
- Wrist-end with elastic band included

44-2321	52 cm.	21-31 cm.	34-47 cm.
44-2321XL	52 cm.	21-31 cm.	45-60 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Golden Brown™ CLOTHING

44-2106 Spats for leg and shoe protection

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-2106	33-43 cm.	15 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-2114 Spats for leg and shoe protection

- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-2114	37-47 cm.	36 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Golden Brown™ CLOTHING

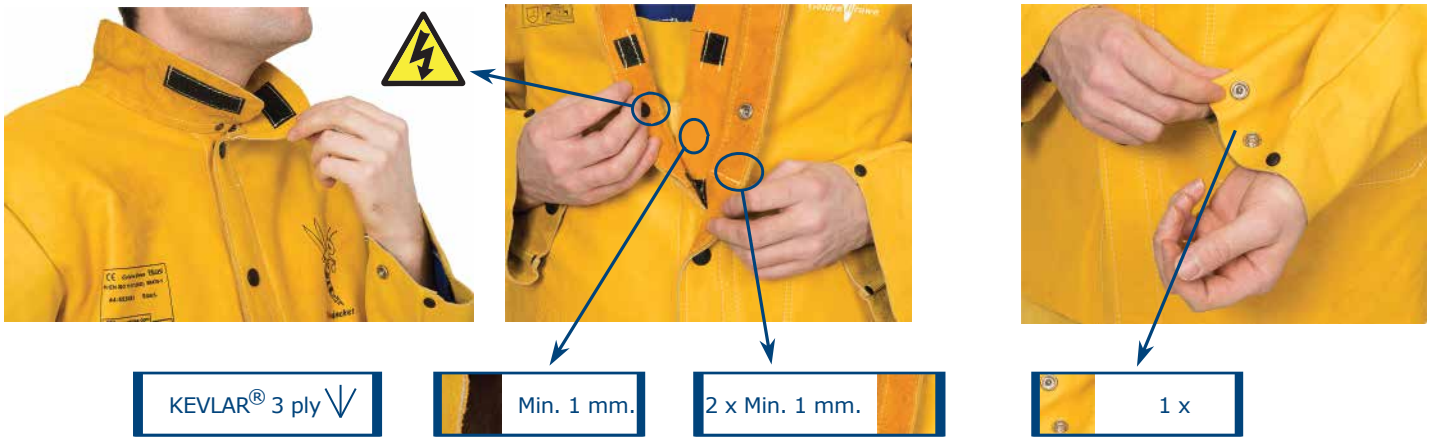

Golden Brown™ products are made of high quality side split or grain cow leather

Golden Brown™ split leather products: pages 22, 23, 24, 25. Grain leather products: page 26.

44-5530 Jacket full leather

- Grain cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-5530L	81 cm.	112 cm.
44-5530XL	86 cm.	124 cm.
44-5530XXL	91 cm.	136 cm.
44-5530XXXL	96 cm.	148 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132801 0001
TÜV 60140939 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

44-5600 Pants with breast protection, bib and brace

- Grain cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-5600L	140 cm.
44-5600XL	144 cm.
44-5600XXL	148 cm.
44-5600XXXL	152 cm.

Golden Brown™

Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132801 0001
TÜV 60140939 001

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Yellowjacket® CLOTHING

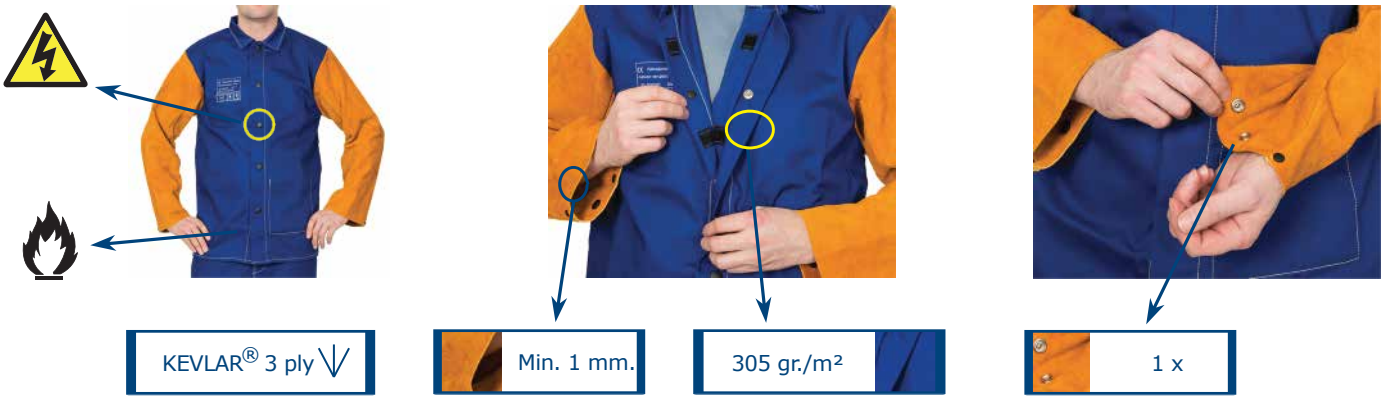

Yellowjacket® product is made of 305 gr./m² flame retardant cotton body and split cow leather sleeves

33-3060 Jacket, flame retardant cotton with leather sleeves

- 305 gr./m² flame retardant cotton body
- split cow leather sleeves
- KEVLAR® 3 ply

33-3060S	76 cm.	108 cm.
33-3060M	76 cm.	116 cm.
33-3060L	81 cm.	127 cm.
33-3060XL	86 cm.	138 cm.
33-3060XXL	91 cm.	147 cm.
33-3060XXXL	96 cm.	158 cm.
33-3060XXXXL	96 cm.	168 cm.

Yellowjacket®

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001

CE



EN ISO 11611:2015 CLASS 1/A1+A2

Arc Knight® CLOTHING

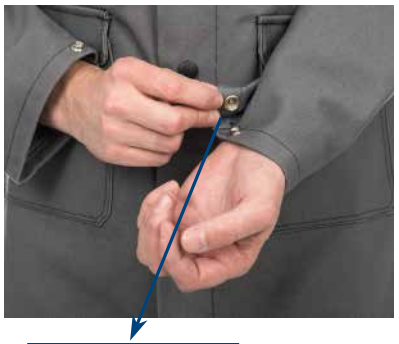

KEVLAR® 3 ply

520 gr./m²

Double material

1 x

***Arc Knight*® 38-4350, 38-4355, 38-44.. and 38-4340 are made of heavy duty 520 gr./m² FR cotton with split cow leather reinforcement.**

***Arc Knight*® 38-4330, 38-4335, 38-4375, 38-4328, 38-43.., 38-4360 and 38-4321XL are made of heavy duty 520 gr./m² FR cotton.**

38-4350 Jacket with leather reinforcement

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton with black split cow leather reinforcement
- KEVLAR® 3 ply
- Sleeve with double closure

38-4350M	76 cm.	96 cm.
38-4350L	81 cm.	104 cm.
38-4350XL	86 cm.	112 cm.
38-4350XXL	91 cm.	120 cm.
38-4350XXXL	96 cm.	128 cm.

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

38-4330 Jacket

44-7820
44-7828
44-7836
44-7836XL
(see page 17)

38-4320
(see page 30)

44-2828
44-2836
(see page 23)

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply
- Possibility to add a ***Lava Brown***™ or ***Golden Brown***™ apron to this jacket

38-4330M	76 cm.	96 cm.
38-4330L	81 cm.	104 cm.
38-4330XL	86 cm.	112 cm.
38-4330XXL	91 cm.	120 cm.
38-4330XXXL	96 cm.	128 cm.

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

www.weldas.com

EN ISO 11611:2015 CLASS 2/A1+A2

Arc Knight® CLOTHING

38-4335 Jacket, high visibility

- High visibility
- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply
- Available in size: M, L, XL, XXL, XXXL

NEW

38-4355 Jacket, high visibility

Arc Knight®

www.weldas.com

CE

EN ISO 11611:2015
CLASS 2/A1+A2
EN ISO 20471:2013
+ A1:2016 clause 6
TÜV BP 60122567 0003
TÜV 21260757 003

38-4375 Lab coat

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply

38-4375M	114 cm.	96 cm.
38-4375L	114 cm.	104 cm.
38-4375XL	114 cm.	112 cm.
38-4375XXL	114 cm.	120 cm.

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

38-4328 Cape sleeve

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply

38-4328M	96 cm.
38-4328L	104 cm.
38-4328XL	112 cm.
38-4328XXL	120 cm.
38-4328XXXL	128 cm.

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

CE

www.weldas.com

EN ISO 11611:2015
CLASS 2/A1+A2

Arc Knight® CLOTHING

38-4320 Apron for cape sleeve

- High comfort and flexibility
- Black split cow leather
- KEVLAR® 3 ply

	↕	↔
38-4320	51 cm.	56 cm.

Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

EN ISO 11611:2015
CLASS 2/A1+A2

38-43.. Apron

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply
- Self-balancing strap system

	↕	↔
38-4336	91 cm.	60 cm.
38-4342	107 cm.	60 cm.
38-4342 W	107 cm.	80 cm.

COMFORT

Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

EN ISO 11611:2015
CLASS 2/A1+A2

38-44.. Apron with leather reinforcement

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
  with black split cow leather reinforcement
- KEVLAR® 3 ply
- Self-balancing strap system

	↕	↔
38-4436	91 cm.	60 cm.
38-4442	107 cm.	60 cm.
38-4442 W	107 cm.	80 cm.

COMFORT

Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

EN ISO 11611:2015
CLASS 2/A1+A2

Arc Knight® CLOTHING

38-4360 Pants

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

38-4360M	79 cm.
38-4360L	81 cm.
38-4360XL	83 cm.
38-4360XXL	85 cm.

Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003
CE



EN ISO 11611:2015
CLASS 2/A1+A2

38-4340 Pants with leather reinforcement, breast protection, bib and brace

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton with black split cow leather reinforcement
- KEVLAR® 3 ply

38-4340M	136 cm.
38-4340L	140 cm.
38-4340XL	144 cm.
38-4340XXL	148 cm.
38-4340XXXL	152 cm.



Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003
CE



EN ISO 11611:2015
CLASS 2/A1+A2

38-4321XL Sleeves

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply

38-4321XL	52 cm.	21-31 cm.	45-60 cm.

Arc Knight®
EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003
CE



EN ISO 11611:2015
CLASS 2/A1+A2

Fire Fox™ CLOTHING

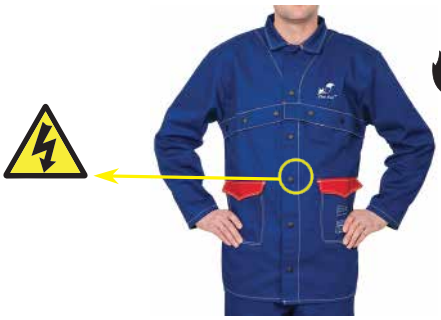

KEVLAR® 3 ply

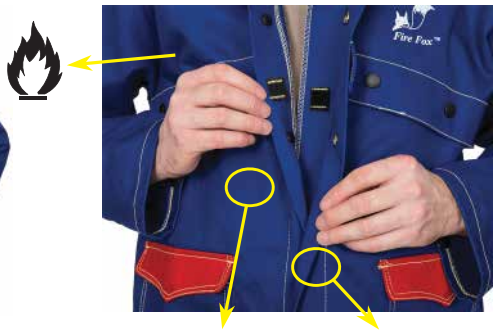

305 gr./m²

Double material

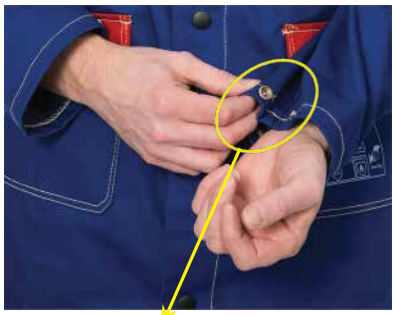

1 x

***Fire Fox™* clothing is made of 305 gr./m² flame retardant cotton**

33-2300 Jacket

44-7820
44-7828
44-7836
44-7836XL
(see page 17)

44-2828
44-2836
(see page 23)

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add a ***Lava Brown***™ or ***Golden Brown***™ apron to this jacket

33-2300M	76 cm.	96 cm.
33-2300L	81 cm.	104 cm.
33-2300XL	86 cm.	112 cm.
33-2300XXL	91 cm.	120 cm.
33-2300XXXL	96 cm.	128 cm.

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0001
TÜV 21220109 002

CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

33-2600 Pants

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

33-2600M	79 cm.
33-2600L	81 cm.
33-2600XL	83 cm.
33-2600XXL	85 cm.
33-2600XXXL	87 cm.

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0001
TÜV 21220109 002

CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

Fire Fox™ CLOTHING

33-2700 Pants with breast protection, bib and brace

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

33-2700M	79 cm.
33-2700L	81 cm.
33-2700XL	83 cm.
33-2700XXL	85 cm.
33-2700XXXL	87 cm.

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0001
TÜV 21220109 002

CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

33-2800 Coverall

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

33-2800M	176 cm.
33-2800L	180 cm.
33-2800XL	184 cm.
33-2800XXL	188 cm.
33-2800XXXL	196 cm.

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0001
TÜV 21220109 002

CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

33-2320 Sleeves

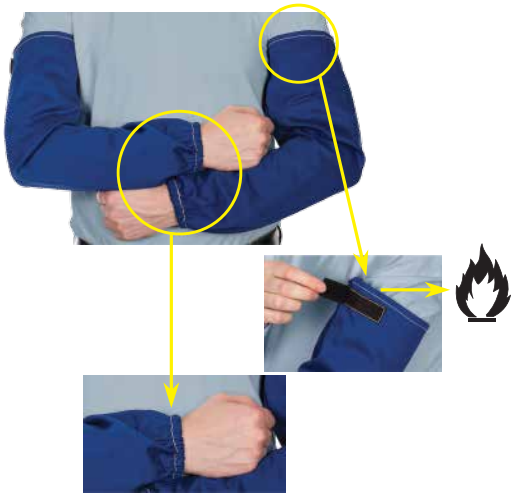

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply

33-2320	52 cm.	19-32 cm.	36-47 cm.

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0001
TÜV 21220109 002

CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

Fire Fox™ FR COTTON CAPS

23-*514 FR Cap

Fire Fox™
EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0002
TÜV 21220109 002
CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

23-*515 FR Cap

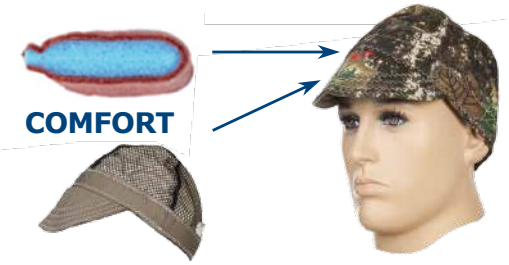

Choose the best size for all caps:
*** = 1, 2, 3, 4, 5, 6, 7**

Size	Articlenumber	
7	23-**1**xxx	56 cm.
7 1/8	23-**2**xxx	57 cm.
7 1/4	23-**3**xxx	58 cm.
7 3/8	23-**4**xxx	59 cm.
7 1/2	23-**5**xxx	60 cm.
7 5/8	23-**6**xxx	61 cm.
7 3/4	23-**7**xxx	62 cm.

COTTON CAPS

23-*503 Camouflage

23-*507 USA flag

23-*524 Wild

Fire Fox™ FR BEANIE

23-8000 FR Beanie

- Often used in combination with helmet
- High comfort and flexibility
- 305 gr./m² flame retardant cotton

23-8000L 56-59 cm.
23-8000XL 59-62 cm.

Fire Fox™
EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0002
TÜV 21220109 002
CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

Fire Fox™ FR COTTON DOO-RAGS

23-3612 FR Doo-Rag

23-3613 FR Doo-Rag

Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0002
TÜV 21220109 002

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

23-3611 FR Doo-Rag

23-3615 FR Doo-Rag

- Often used in combination with helmet
- High comfort and flexibility
- Sweatband integrated in the front of the Doo-Rag
- 305 gr./m² flame retardant cotton

All Doo-Rags, one size fits all:

46-68 cm.

COTTON DOO-RAGS

23-3601 Camouflage

23-3602 Wild

23-3604 USA flag

23-3606 Happy Hour

23-3607 Paradise

23-3609 European flag

Fire Fox™ FR HELMET HOODS

23-6680, 23-6680XL

23-6680/LV

23-6690

- Connectable to helmet gear
- Hook and loop closure
- 305 gr./m² flame retardant cotton

Multiple sizes and lengths

Fire Fox™
EN ISO 11611:2007
CLASS 1/A1+A2
TÜV BP 60097781 0002
TÜV 21220109 002
CE

www.weldas.com

EN ISO 11611:2007
CLASS 1/A1+A2

TURMOflex® WINTER HELMET LINERS

23-7701

23-7702

23-7733

23-7711

23-7766

before washed

SWEATSOpad® HELMET COMFORTER

"Most comfortable sweatband in the world"

- Helmet pad and sweatband combined in one piece air cushioned *SWEATSOpad*®
- Flame retardant
- No more "helmet head"!
- No more slippage!
- No more sweat!

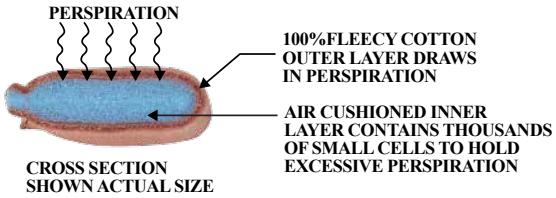

20-3100V, 20-3100V/17

5 x

20-3100V	22 cm.
20-3100V/17	17 cm.

SWEATSOpad®
EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001
CE

20-3200V

5 x

20-3200V	25 cm.

SWEATSOpad®
EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001
CE

20-3300V

5 x

20-3300V	14 cm.

SWEATSOpad®
EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001
CE

LEATHER HELMET CAPS AND BIBS

44-7180

- Grain leather helmet cap
- Black grain pigskin
- Will fit over the helmet gear and can be attached with hook and loop to the top of the helmet gear.

44-7181

- Grain leather back neck protection
- Black grain pigskin
- Made to be attached with hook and loop to the cap (= art.nr. 44-7180)

- Dimensions:



44-7182

- Grain leather front neck protection
- Black grain pigskin
- Can be attached with hook and loop to the helmet inside or outside

- Dimensions:



44-7184

- Split leather Front neck protection
- Black split cowhide
- Can be attached with hook and loop to the helmet inside or outside

- Dimensions:



ACCESSORIES

44-7111

- Foldable inspector mask
- Fits glass: 110 x 50 mm.
- Glass not included

KEVLAR® 3 ply

44-7110

- Electrode bag with hanging system
- To be filled with max. 2 kg. electrodes
- Double leather construction

KEVLAR® 3 ply

ACCESSORIES

44-3006LB, 44-3006LB/PR

- High heat reflective handshield
- Split cowhide leather back with ***aluminized PFR front***
- Also available in pairs (44-3006LB/PR)

KEVLAR® 5 ply

15 cm. 20 cm.

EN 532
TÜV 744-800515/25

CE

www.weldas.com

44-3008LB

- High heat reflective handshield
- Split cowhide leather back with ***fiber glass front***
- Extra heat resistant

15 cm. 20 cm.

KEVLAR® 5 ply

44-3009BF

- High heat reflective handshield
- ***Black coated fiber glass back with fiber glass front***
- Heavy duty handshield for the toughest applications

15 cm. 20 cm.

KEVLAR® 5 ply

10-1099

- TIG finger
- For extra protection
- For extra stability in position welding
- Silica fabric
- With hook and loop

KEVLAR® 3 ply

∅ 3,5 cm. 16 cm.

10-1911/UL

NEW

Glove Medic™

- **10-1911/UL**
  Repair & reinforcement kit for unlined gloves such as TIG welding, drivers and mechanic gloves.

- **10-2911/LI**
  Repair & reinforcement kit for lined gloves such as stick or MIG welders, heavy duty work, heat resistant gloves.

Caution: *For certified gloves, check ratings before operation. For non-certified gloves, owner is responsible to ensure proper protection before operation.*

10-2911/LI

NEW

WELDING PILLOWS

44-7900

- 50 x 50 x 8 cm.
- KEVLAR® 3 ply

44-7905

- 39 x 33 x 3 cm.
- KEVLAR® 3 ply

44-7910

- 50 x 50 x 8 cm.
- KEVLAR® 3 ply

44-7915

- 39 x 33 x 3 cm.
- KEVLAR® 3 ply

44-7920

- 50 x 50 x 8 cm.
- KEVLAR® 3 ply

44-7925

- 39 x 33 x 3 cm.
- KEVLAR® 3 ply

PYTHONrap™ CABLE COVERS

T = Tube

44-xxxxT

44-1022T	22 mm dia	1 m length lightbrown leather cable cover
44-1027T	27 mm dia	1 m length lightbrown leather cable cover

V = Hook and loop

44-xxxxV

44-0550V	50 mm dia	5 m length lightbrown leather cable cover
44-1050V	50 mm dia	10 m length lightbrown leather cable cover
44-5030V/MTR	30 mm dia	Lightbrown leather cable cover PER METER
44-5050V/MTR	50 mm dia	Lightbrown leather cable cover PER METER

Z = Zipper

44-xxxxZ

44-3001Z	22 mm dia	1 m length lightbrown leather cable cover
44-3010Z	22 mm dia	3 m length lightbrown leather cable cover
44-3022Z	22 mm dia	6,7 m length lightbrown leather cable cover
44-3922Z	22 mm dia	3,9 m length lightbrown leather cable cover
44-3928Z	28 mm dia	3,9 m length lightbrown leather cable cover
44-7922Z	22 mm dia	7,9 m length lightbrown leather cable cover
44-7928Z	28 mm dia	7,9 m length lightbrown leather cable cover
44-4001Z	32 mm dia	1 m length lightbrown leather cable cover
44-4525Z	37 mm dia	2,5 m length lightbrown leather cable cover
44-4535Z	37 mm dia	3,5 m length lightbrown leather cable cover

44-xxxxZ

44-3601Z	22 mm dia	1 m length black grain leather cable cover
44-3628Z	28 mm dia	1 m length black grain leather cable cover

44-xxxxZ

44-4023Z	23 mm dia	4 m length black flame retardant nylon cable cover
44-4028Z	28 mm dia	4 m length black flame retardant nylon cable cover
44-8023Z	23 mm dia	8 m length black flame retardant nylon cable cover
44-8028Z	28 mm dia	8 m length black flame retardant nylon cable cover

KEVLAR® 3 ply

Other length / diameter combinations on request

LAVAshield® WELDING BLANKETS

50-1866

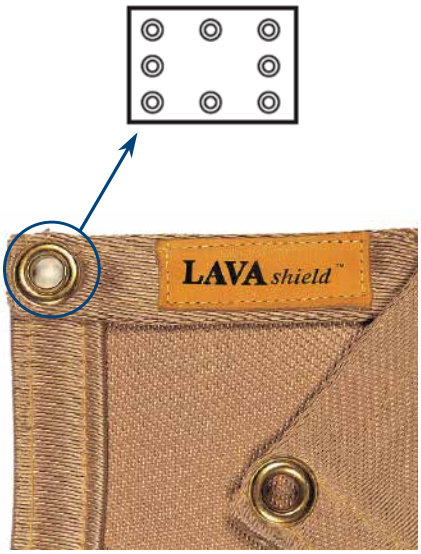

- Silica fabric
- 174 x 174 cm.
- ± 1000°C
- ± 600 gr./m²
- KEVLAR® 3 ply

50-2368/2468

- Black fiberglass
- Neoprene / neoprene coating
- 174 x 234 cm.
- ± 550°C
- ± 800 gr./m²
- KEVLAR® 3 ply

50-3068

- Gold fiberglass
- Acryl / neoprene coating
- 174 x 234 cm.
- ± 550°C
- ± 1000 gr./m²
- KEVLAR® 3 ply

50-2472 Per meter

- Black fiberglass
- Neoprene / neoprene coating
- Not locked stitched
- Without grommets
- Width ± 183 cm.
- Total roll length ± 45 mtr.
- ± 550°C
- ± 800 gr./m²

50-3072 Per meter

- Gold fiberglass
- Acryl / neoprene coating
- Not locked stitched
- Without grommets
- Width ± 183 cm.
- Total roll length ± 45 mtr.
- ± 550°C
- ± 1000 gr./m²

LAVAshield®

ISO 9150:1988-12

TÜV 21278287 001

CE

www.weldas.com

LAVAshield® WELDING SCREENS

55-6166 Orange/Red 1.74 x 1.74 mtr.

Fits within frame 1.8 x 1.8 mtr.

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas® *COMBOframe*™: 55-8668

28 pcs. plastic grommets

LAVAshield®

DIN EN ISO 25980:2015-01
13821-PZA-17

CE

www.weldas.com

55-6168 Orange/Red 1.74 x 2.34 mtr.

Fits within frame 1.8 x 2.4 mtr.

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas® *COMBOframe*™: 55-8668

32 pcs. plastic grommets

LAVAshield®

DIN EN ISO 25980:2015-01
13821-PZA-17

CE

www.weldas.com

55-7166 Green 1.74 x 1.74 mtr.

Fits within frame 1.8 x 1.8 mtr.

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas® *COMBOframe*™: 55-8668

28 pcs. plastic grommets

LAVAshield®

DIN EN ISO 25980:2015-01
13822-PZA-17

CE

www.weldas.com

55-7168 Green 1.74 x 2.34 mtr.

Fits within frame 1.8 x 2.4 mtr.

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas® *COMBOframe*™: 55-8668

32 pcs. plastic grommets

LAVAshield®

DIN EN ISO 25980:2015-01
13822-PZA-17

CE

www.weldas.com

COMBOframe™ MODULAR FRAME

55-8668

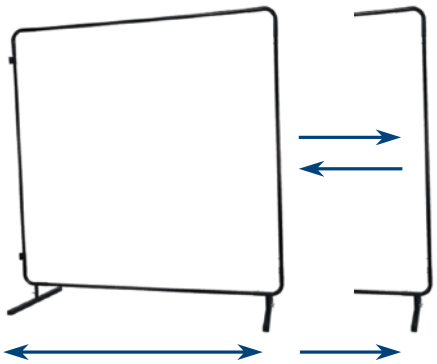

1.8 x 1.8 mtr. 1.8 x 2.4 mtr.

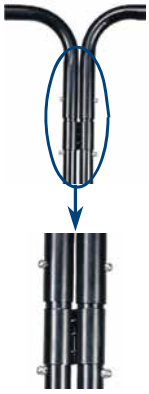

55-8668	1.8 x 1.8 mtr. / 1.8 x 2.4 mtr.

- Weldas® *COMBOframe*™ suitable for the welding screens: 55-6166, 55-6168, 55-7166, 55-7168
- Will be delivered as only frame (incl. swivelset), without screens

COMBOframe™

LAVAshield® WELDING SCREENS PER METER

55-6166/MTR Orange/Red

- Heat sealed seam and grommets at one side
- Distance between grommets ± 20 cm.
- Will be delivered together with rings Ø 50 mm.
- Height ± 1.78 mtr.
- Total roll length ± 27 mtr.

LAVAshield®

DIN EN ISO 25980:2015-01
13821-PZA-17

CE

www.weldas.com

55-7166/MTR Green

- Heat sealed seam and grommets at one side
- Distance between grommets ± 20 cm.
- Will be delivered together with rings Ø 50 mm.
- Height ± 1.78 mtr.
- Total roll length ± 27 mtr.

LAVAshield®

DIN EN ISO 25980:2015-01
13822-PZA-17

CE

www.weldas.com

LAVAshield® ECONO STRIP SCREENS

55-6166/Strip Orange/Red

0.68 x 1.8 mtr.

- Will be delivered together with 5 rings Ø 50 mm.

LAVAshield®

DIN EN ISO 25980:2015-01
13821-PZA-17

CE

www.weldas.com

55-7166/Strip Green

0.68 x 1.8 mtr.

- Will be delivered together with 5 rings Ø 50 mm.

LAVAshield®

DIN EN ISO 25980:2015-01
13822-PZA-17

CE

www.weldas.com

LAVAshield® CONNECTABLE WELDING SCREENS

55-6218 Orange/Red

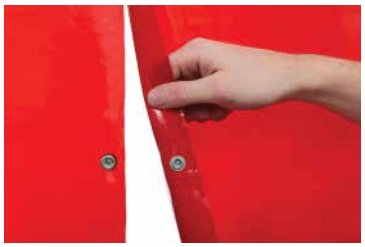

1.37 x 1.8 mtr.

- Connectable welding screen
- Heat sealed seams
- Will be delivered together with 9 rings Ø 50 mm.

LAVAshield®

DIN EN ISO 25980:2015-01
13821-PZA-17

CE

www.weldas.com

55-7218 Green

1.37 x 1.8 mtr.

- Connectable welding screen
- Heat sealed seams
- Will be delivered together with 9 rings Ø 50 mm.

LAVAshield®

DIN EN ISO 25980:2015-01
13822-PZA-17

CE

www.weldas.com

SELECTION CRITERIA

In order to make the right choice in a type and/or model of a personal protection product the user should make for himself selection criteria in order to come up with the best choice for his/her situation.
Weldas wants to help with that by giving you a number of selection criteria to start by making the right choice.
Please read for that the 2 following pages carefully.

General selection criteria for leather products such as welding gloves and welding clothing

Choosing the right product is always important to make the workplace productive but also safe.
The factors to consider include one or more of the following arguments:

- Protection arguments: resistant to heat, flame, molten splashes, UV, electricity and punctures.
- Health arguments: values of pH, Chromium, PCP or other substances that needs to be within limits.
- Durability arguments: values of abrasion resistance, tensile strength, tear resistance, heat related dimensional change resistance, reinforced seams and stress points as well as thread strength and flame resistance.
- Comfort arguments: the right sizing and fit, dexterity, fingertip sensitivity, weight, sweat vapor transmission and absorption and climate and oil resistant.

Type of leather selection criteria for leather products such as welding gloves and welding clothing:

Type of leather	*Features*
Split cow leather	Heat & flame resistant, material breaths because of open structure, also low priced
Grain cow leather	Pliable and strong, water and oil resistant
Suede (reversed) pig leather	Soft and comfortable and mostly lower priced than other leathers
Grain deer leather	Fit and dexterity and, with that, very good comfort as well as water and oil resistant
Grain goat leather	Fit and dexterity, light weight and very good comfort as well as water and oil resistant
Grain bison leather	Fit and dexterity, very good comfort, high mechanical value as well as water and oil resistant

Leather grades and terminology:

Different portions of the hide of an animal have different characteristics: the side offers the best strength and most constant quality, the shoulder offers good strength and pliability, the belly is the lowest in quality but also the most economical.

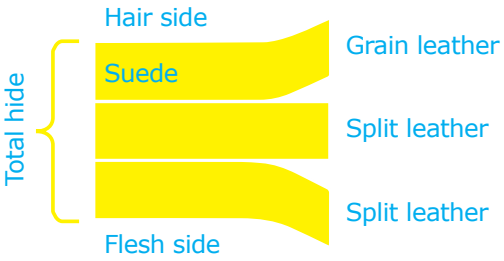

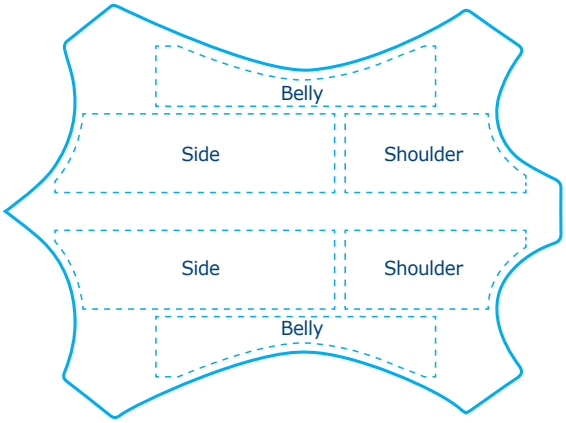

Choice of thumb design:

Straight thumb	*Wing thumb*	*Keystone thumb*
For extra sensitivity and/or extra welding gun grip	For seamless palm durability	For comfortable fit

Note on thumb/palm design: extra durability and/or cut resistance can be achieved by adding an extra reinforcement around thumb and/or on palm of the glove.

Remark: the choice of materials and design for welding gloves and clothing but also for other products out of the Weldas product program always depend on what the applicable European norm desires. For that reason our products are tested and certified by a, by the European Union approved, test and certification laboratory. All test reports and certificates can be found on our special CE website:

www.weldas-ce.com

Weldas offers a lot of information through it's catalog, website and other means of publication in order to help the user to make the right choice of product for it's personal protection but it is and will always be the responsability of the user what product he/she does choose.

INFORMATION ON EUROPEAN NORMS

In 1989 the council of the European community agreed on the directive 89/686/EEC which requires employers to use the appropriate personal protective equipment (PPE). As of April 21, 2018 the Regulation (EU) 2016/425 repealed the directive 89/686/EEC. All products used for personal protection must be marked with the appropriate basic CE marking and extended if the applicable norm does ask for it and according to it's intended use.
The regulation recognizes 3 levels of protection and the products to go with these levels:

Example of imprint of a Weldas® certified glove:



Category I
Category I includes exclusively the following minimal risks:
(a) superficial mechanical injury; (b) contact with cleaning materials of weak action or prolonged contact with water; (c) contact with hot surfaces not exceeding 50 °C;
(d) damage to the eyes due to exposure to sunlight (other than during observation of the sun);
(e) atmospheric conditions that are not of an extreme nature.

Category II
Category II includes risks other than those listed in Categories I and III;

Category III
Category III includes exclusively the risks that may cause very serious consequences such as death or irreversible damage to health relating to the following:
(a) substances and mixtures which are hazardous to health; (b) atmospheres with oxygen deficiency; (c) harmful biological agents; (d) ionising radiation; (e) high-temperature environments the effects of which are comparable to those of an air temperature of at least 100 °C;
(f) low-temperature environments the effects of which are comparable to those of an air temperature of – 50 °C or less;
(g) falling from a height; (h) electric shock and live working; (i) drowning; (j) cuts by hand-held chainsaws;
(k) high-pressure jets; (l) bullet wounds or knife stabs; (m) harmful noise.

Basic norms and pictograms used for personal protection:

EN 420 norm on sizing of gloves: see page 9 of this catalogue.

EN 388 norm on mechanical risks for gloves:

Digit	Test Resistance	Level 1	Level 2	Level 3	Level 4	Level 5	
1st	Abrasion (# cycles)	100	500	2000	8000	-	
2nd	Blade Cut (index)	1,2	2,5	5,0	10,0	20,0	
3rd	Tear (Newton)	10	25	50	75	-	
4th	Puncture (Newton)	20	60	100	150	-	
5th	TDM Cut resistance (Newton)	A 2	B 5	C 10	D 15	E 22	F 30

EN 407 norm thermal risks for gloves:

Digit	Test Resistance	Digit	Test Resistance
1st	Burning behaviour	5th	Small splashes of molten metal
2nd	Contact heat		
3rd	Convective heat	6th	Large quantities of molten metal
4th	Radiant heat		

EN 12477 norm on welding gloves and allied processes:

Minimum requirements	according to EN....	Type A Minimum Rating		Type B Minimum Rating	
Electrical Insulation	pr1149-2		R≥10^6Ω		R≥10^5Ω
Abrasion Resistance	EN 388	2	500 cycles	1	100 cycles
Blade Cut Resistance	EN 388	1	Index 1,2	1	Index 1,2
Tear Resistance	EN 388	2	25 N	1	10 N
Puncture Resistance	EN 388	2	60 N	1	20 N
Burning Behaviour	EN 407	3		2	
Contact Heat Resistance	EN 407	1	100° C	1	100° C
Convective Heat Resistance	EN 407	2	HTI≥7	0	
Small Molten Splash Resistance	EN 407	3	25 Droplets	2	15 Droplets
Dexterity (pick up of rod dia.)	EN 420	1	≤11mm	4	≤6,5mm

EN 11611 norm on welding clothing and allied processes:

Requirement(s)	Class 1	Class 2
Tensile strength — woven outer textile material — leather	400 N 80 N	
Tear strength	20 N	
Dimensional change of woven textile materials Dimensional change of knitted textile materials	≤ ± 3 % ≤ ± 5 %	
Flame spread [a] : For ISO 15025:2000, Procedure B, this requirement is not applicable.	ISO 15025:2000, Procedure A,(surface ignition) ; ISO 15025:2000, Procedure B, (edge ignition) No flaming to the top or either side edge; No hole formation a; No flaming or molten debris Mean afterflame ≤ 2 s; Mean afterglow ≤ 2 s	
Impact of spatter	15 drops	25 drops
Heat transfer (radiation)	RHTI 24 W 7	RHTI 24 W 16
Burst strength	200kPa	
Seam strength — textile material — leather	225 N 110 N	
Electrical resistance	>10^5Ω	
Innocuousness	See 6.11	
Leather	Fat content: ≤ 15 %	

Weldas® Europe B.V.
Blankenweg 18
NL-4612 RC Bergen op Zoom
Holland

Tel.: +31 164 27 46 50
Fax: +31 164 27 46 55
europe@weldas.eu
www.weldas.com

YouTube

WWW.WELDAS-CE.COM

KEVLAR® is a registered trademark of E.I. DuPont Co.
Weldas® is a registered trademark of Weldas® Company.
Arc Knight® is a registered trademark of Weldas® Co.
COMFOflex® is a registered trademark of Weldas® Co.
DEERSOsoft® is a registered trademark of Weldas® Co.
LAVAshield® is a registered trademark of Weldas® Co.
STEERSOtuff® is a registered trademark of Weldas® Co.
SWEATSOpad® is a registered trademark of Weldas® Co.
TURMOflex® is a registered trademark of Weldas® Co.
Yellowjacket® is a registered trademark of Weldas® Co.
Arc Queen™ is a trademark of Weldas® Co.
COMBOframe™ is a trademark of Weldas® Co.
Fire Fox™ is a trademark of Weldas® Co.
Glove Medic™ is a trademark of Weldas® Co.
Golden Brown™ is a trademark of Weldas® Co.
Lava Brown™ is a trademark of Weldas® Co.
PYTHONrap™ is a trademark of Weldas® Co.
SOFTouch™ is a trademark of Weldas® Co.
ThunderingBison™ is a trademark of Weldas® Co.
©1018 Weldas® Europe B.V.
Printing and typesetting errors reserved.

YOUR DISTRIBUTOR: